



FITTING INSTRUCTIONS FOR ODYSSEY PREMIUM PUSH OUT WINDOW

1. All cut-outs to be -0/+2 mm larger than nominal sizes on ALL windows.
Example: 565 x 1175 Odyssey Premium 4RC Window requires a cut-out size of 565 to 567 High x 1175 to 1177 Wide, with 66 radii cut in each corner.
2. Cut-outs to be square and parallel within 1-2 mm + Plastic corners are used. (Part No. 015618)

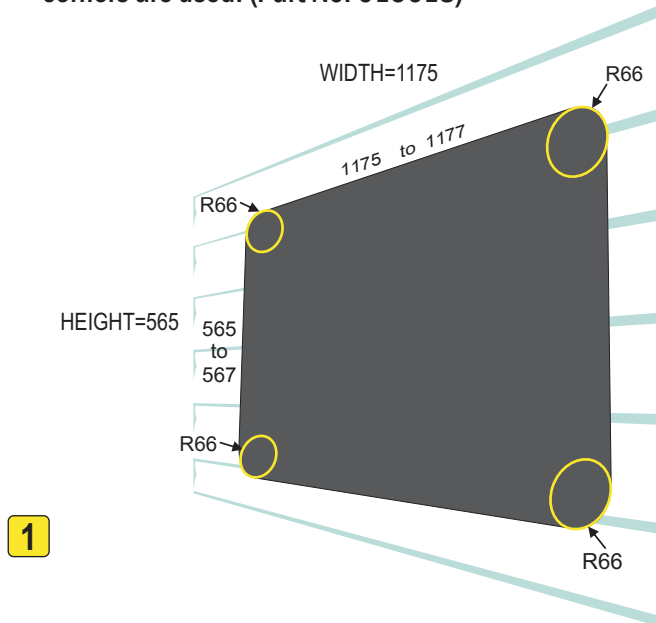

1

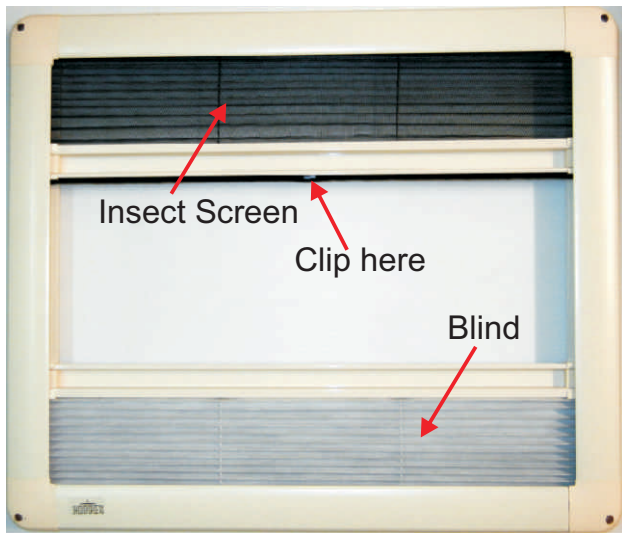

Both screens unclipped

- Clip On Blind functions **FIVE** ways.
1. Window with Fly Screen only.
 2. Window with Blind only.
 3. A Mix of both, unclipped. (Fig. 2)
 4. Both clipped.
 5. Both unclipped and fully open to allow maximum air flow.

Note: **HORREX** logo always at the bottom left hand corner.



3

Clean dust and dirt from around the opening where the window is going to be fitted. Wipe window main frame flange with a dry cloth to remove dust. Apply bedding compound to flange. Foam tape is used in the case of the above picture.



4

- For bedding compound use:
- 1). Butyl Rubber Tape.
 - 2). Double sided or one sided foam tape.
 - 3). 100% silicone rubber sealant.
 - 4). A suitable combination of the above.

MUST BE A FLEXIBLE ADHESIVE



5

Apply foam tape all the way around the flange. Mid-Bottom of the window is a suitable starting point. Take particular care around the four radius corner. Cut off tape end at the starting point to form a continuous seal. Join foam tape, cleanly, as above.



6


Fill cladding seams with silicone - then crush. Position window in opening on the wall of the van where it is going to be permanently installed. Do this from the outside of the van. **Note!** Bottom of the window to go in first - to clear locks, then push in window TOP.



7


One person needs to hold window from the outside of the van until a second person starts reinstalling the clamping to the window from the inside of the van. Clamping must be reinstalled in exact position for the holes to match up.

Note! When using aluminum blind clip allow +4mm MAX cut out tolerance.

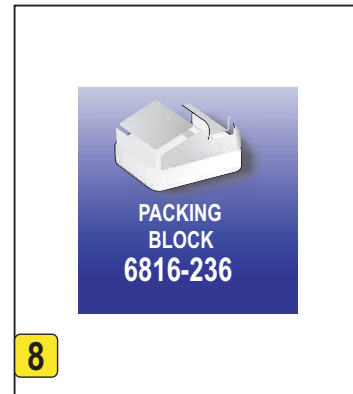

8

Remove Plastic Packing Blocks and make sure window is operational.

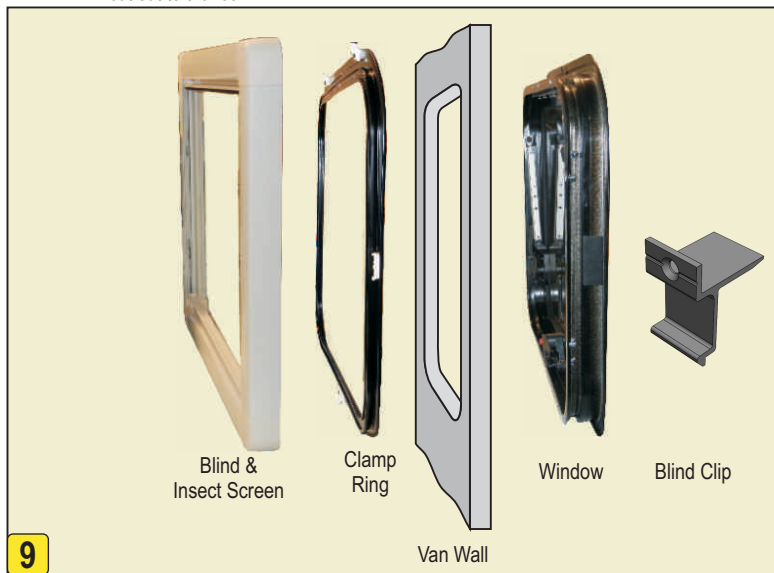

9

A range of Clamping are available - depending on the width of the van wall. Window Main Frame is pre-drilled and 4mm inserts installed. Clamp Rings and Windows are supplied as a set. **DO NOT MIX. Take Care!** Several screws have been inserted to hold the Clamp Ring in place during transportation. Before installation, remove screws. After window is inserted into wall cavity, attach the clamp ring using several 4mm screws provided. **Do not tighten** any screws until all screws have been inserted several turns into the corresponding thread - then fully tighten opposite screws until all have been secured.

***When installing on front of the caravan protector shade with drip mould must be used. Camec recommends installation of angles 20 degrees or less.**

FOR ALUMINIUM CLADDING, FILL OVERLAPPING SEAMS WITH SILICONE AND CRUSH. CLEAN SURFACE AROUND HOLE TO REMOVE OILS, DUST ETC.